


PELI

2025

# FLASHLIGHTS CATALOGUE

# LIGHTS

When you're in a situation that requires a lighting tool, you want to make sure you have the right one. Since 1976, PELI has illuminated the world's darkest and most dangerous places with specialised, professional lighting tools, including ATEX approved models, to support professionals, outdoor enthusiasts and everyday do-it-yourself hobbyists. Regardless of the purpose, our lighting tools enable you to accomplish your tasks in a safer and more efficient manner. Engineered in the U.S and Guaranteed for Life.


**INTRODUCTION** 4-6
Performance Flashlights 4
Glossary of terms 5
Safety 6

**PRODUCTS** 8-21
Industrial Lights 8
ATEX Lights 12
Tactical Lights 18
HeadLamps 20

**SPECIFICATIONS** 22-27

**ACCESSORIES & FEATURES** 28-31




For the most up-to-date information, please visit www.peli.com or www.pelicatalogue.com


For the most up-to-date information, please visit www.peli.com or www.pelicatalogue.com

# PERFORMANCE PELI FLASHLIGHTS

## STANDARDS AND RATINGS (APPLICABLE TO TORCHES ONLY)




### LIGHT OUTPUT

Light Output is the total luminous flux. It is the total quantity of emitted overall light energy as measured by integrating the entire angular output of the portable light source. Light output in this standard is expressed in units of lumens.




### RUN TIME

Run Time is defined as the duration of time from the initial light output value – defined as 30 seconds after the point the device is first turned on – using fresh batteries, until the light output reaches 10% of the initial value.




### BEAM DISTANCE

Beam Distance is defined as the distance from the device at which the light beam is 0.25 lux (0.25 lux is approximately the equivalent of the light emitted from the full moon “on a clear night in an open field”).




### PEAK BEAM INTENSITY

Peak Beam Intensity is the maximum luminous intensity typically along the central axis of a cone of light. The value is reported in candela and does not change with distance.




### WATER RESISTANT

Water Resistant – IPX4 Water splashed against the device from any direction shall have no harmful effects.




### WATER PROOF/SUBMERSIBLE

**Water Proof // IPX7** – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water under standardized conditions of pressure and time.

**Submersible // IPX8** – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is continuously immersed in water under conditions which shall be stated by manufacturer, but which are more severe than for IPX7.

## ANSI STANDARDS (AMERICAN NATIONAL STANDARDS INSTITUTE)

Why create standards? While Peli was one of the first manufacturers to use quantifiable test procedures, the need was recognised to develop a common language that customers could use to select the right torch for their specific needs. As a result, the American National Standards Institute (ANSI), with input from the torch industry, developed performance standards and symbols to effectively communicate a light’s features and benefits. The Resulting ANSI/NEMA FL 1 Standards include the following six criteria.

## GLOSSARY OF TERMS

### CANDELA

A unit of measurement of the intensity of light that is emitted by a light source in a particular direction.

### LUX

The unit of luminous flux in the International System, equal to the amount of light given out through a solid angle by a source of one candela intensity radiating equally in all directions.

### LUMEN

A unit of measurement of the amount of brightness that comes from a light source. Lumens define “luminous flux,” which is energy within the range of frequencies we perceive as light.

### INTEGRATING SPHERE

An integrating sphere is a measurement device with an entrance port that can accept all the directional light output of the device under test, or can totally enclose the device itself. The walls of the sphere should be highly diffuse with high reflectivity (>80%) and the spectroradiometer should be shielded from direct view of the device under test by a baffle system.

### IP (INGRESS PROTECTION)

These ratings specify the environmental protection the enclosure provides. The IP rating normally has two numbers (IPXX). The first number represents protection from solid objects or materials (dust) where as the second number represents protection from liquids (water). With the IP rating IP 54, 5 describes the level of protection from solid objects and 4 describes the level of protection from liquids as described by the IP Rating System (Solids vary from 0-6 IP rating , Liquids vary from 0-8 IP rating).

### RECHARGEABLE

Denotes a torch which contains rechargeable batteries and charging station. These models are shown with the rechargeable icon



For the most up-to-date information, please visit www.peli.com or www.pelicatalogue.com



# SAFETY IN EUROPE

## IS MY TORCH CORRECTLY CERTIFIED BY ATEX?

To meet the exact requirements of the European ATEX directive 2014/34/EU, Peli Lights are tested to ensure that they pose no threat of ignition when operating within hazardous locations. Using approved laboratories, the lights are tested to ensure that they will withstand rigorous impact and drop tests, severe environmental exposure and meet a minimum of IP54 water and dust ingress protection. Longevity and safety are assured by design. Each light certified by ATEX should have a code printed on its body. This code advises the user as to the area in which it can be safely used without risk of explosion.

**CE Ex II 1G EX IA OP IS IIC T4 GA**

ATEX code corresponding to the 1975Z0 torch

**Need more information about ATEX? Please visit www.peli.com/atex**

**Download our poster on ATEX Directive 2014/34/EU.**

SAFETY APPROVED

## COMPARISON TABLE US (UL, FM) AND EUROPEAN (ATEX) CLASSIFICATIONS

| | HAZARDOUS AREA ELECTRICAL GUIDELINES | | | | |
|---|---|---|---|---|---|
| | **SUBSTANCE** | **TYPICAL ENVIRONMENTS** | **US CLASSIFICATIONS** | **EUROPEAN CLASSIFICATION** | **VOLATILITY*** |
| **CLASS I** | **Flammable Gasses, Vapors or Liquids** (Acetylene, Hydrogen, Ethylene, Propane) | **Oil Refinery Paint Warehouse Offshore Oil Rig Spray Booth** | **Division 1** (Hazard Likely) | **Category 1 / Zone 0** (Hazard Certain) | MOST |
| | | | | **Category 2 / Zone 1** (Hazard Likely) | |
| | | | **Division 2** (Hazard Not Likely) | **Category 3 / Zone 2** (Hazard Not Likely) | |
| **CLASS II** | **Combustible Dusts** (Metals [Div.1 only], Coal, Grain) | **Coal Mine Grain Silo Munitions Factory Hay Storage Facility** | **Division 1** (Hazard Likely) | **Category 1 / Zone 20** (Hazard Certain) | |
| | | | | **Category 2 / Zone 21** (Hazard Likely) | |
| | | | **Division 2** (Hazard Not Likely) | **Category 3 / Zone 22** (Hazard Not Likely) | |
| **CLASS III** | **Ignitable Fibers & Flyings** (Machined Magnesium) | **Paper Mill Woodworking Facility Textile Mill Cotton Gin** | **Division 1** (Hazard Likely) | **N/A** | |
| | | | **Division 2** (Hazard Not Likely) | **N/A** | LEAST |


* A torch certified to Category 1 (Zone 0) is safe for use in areas rated Category 2 (Zone 1) and Category 3 (Zone 2). Conversely the opposite is not possible. This information should be taken only as a guideline. Contact us for specific details on both, US and European Directives.

| US CLASSIFICATIONS | |
|---|---|
| **Division 1** Where volatile substances can exist all of the time or some of the time under normal operating conditions. | **Division 2** Where volatile substances are not likely to exist under normal operating conditions. |

| EUROPEAN CLASSIFICATIONS | |
|---|---|
| **Category 1 / Zone 0** Flammable material present for long periods (more than 1.000 hours* a year). | **Category 3 / Zone 2** Flammable material present for short periods (less than 10 hours* a year). |
| **Category 2 / Zone 1** Flammable material present in normal operation (10- 1.000 hours* a year). | |

* These hours are guidelines adopted by various organisations. They are not coming from official ATEX sources.

## DIAGRAM OF CLASS / DIVISIONS / ZONES

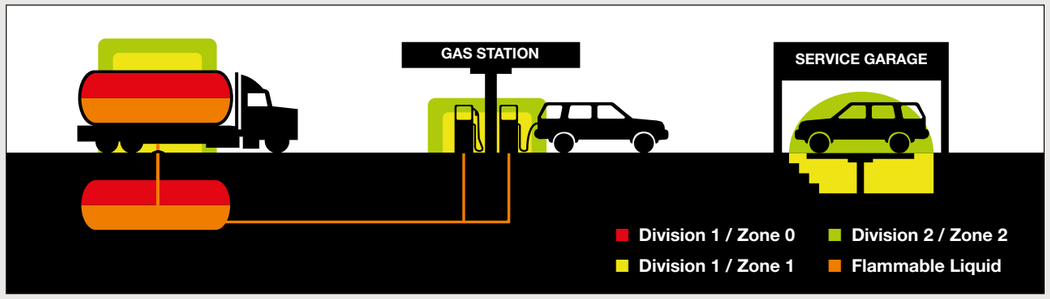



For the most up-to-date information, please visit www.peli.com or www.pelicatalogue.com

# INDUSTRIAL LIGHTS

Engineered for the toughest jobs, Peli industrial lights are designed to deliver unmatched reliability when it matters most. Built with ultra-durable materials, these hand-held lights withstand extreme conditions, from intense heat to heavy impact. With options like photoluminescent "glow-in-the-dark" bodies, you'll never struggle to locate your light in low-visibility situations. Compact enough to clip to a helmet or fit in a pocket, they're the ultimate companion for professionals who need powerful, portable illumination on demand.

**SEE ALL**

**RECHARGEABLE**

## 1910

**LIGHT SOURCE**
LED
**BATTERIES**
1 AAA Alkaline (included)
**LENGTH**
9.7 cm (3.8")
**MODES**
High / Low



| UP TO | LUMENS | RUN TIME |
|---|---|---|
| | 106 | 4h |

## 1920

**LIGHT SOURCE**
LED
**BATTERIES**
2 AAA Alkaline (included)
**LENGTH**
14.0 cm (5.5")
**MODES**
High / Low



| UP TO | LUMENS | RUN TIME |
|---|---|---|
| | 224 | 8h 45m |

## 1930 L1™

**LIGHT SOURCE**
LED
**BATTERIES**
4 LR 44 Alkaline (included)
**LENGTH**
6.7 cm (2.64")
**CERTIFICATIONS**
CI, D1/CII, D2 IECEx ia



| LUMENS | RUN TIME |
|---|---|
| 12 | 4h 15m |

## 2010 SABRELITE™

**LIGHT SOURCE**
LED
**BATTERIES**
3 C Alkaline (not included)
**LENGTH**
20.6 cm (8.11")
**CERTIFICATIONS**
CI II III, D1 IECEX ia



| LUMENS | RUN TIME |
|---|---|
| 161 | 22h |

**Photoluminescent**
2013PL Shroud





## 2410 STEALTHLITE™

**LIGHT SOURCE**
LED

**BATTERIES**
4 AA Alkaline (included)

**LENGTH**
17.8 cm (7")

**CERTIFICATIONS**
CI II III, D1 IECEx ia



| LUMENS | RUN TIME |
|---|---|
| 183 | 5h 45m |

## 2460 STEALTHLITE™

**LIGHT SOURCE**
LED

**BATTERIES**
4 NiMH (included)

**LENGTH**
17.8 cm (7")

**CERTIFICATIONS**
CI II, D2



| LUMENS | RUN TIME |
|---|---|
| 183 | 5h |




## 3310PL PHOTOLUMINESCENT

**LIGHT SOURCE**
LED

**BATTERIES**
3 AA Alkaline (included)

**LENGTH**
15.6 cm (6.14")

**MODES**
High / Low / Flashing
(torch body glows in the dark)

(Photoluminescent)





| UP TO | LUMENS | RUN TIME |
|---|---|---|
| | 378 | 202h |

## 3310ELS (EMERGENCY LIGHTING SYSTEM)

**LIGHT SOURCE**
LED

**BATTERIES**
3 AA Alkaline (included)

**LENGTH**
15.6 cm (6.14")

**INCLUDES**
3310PL and Wall Mountable Case
(torch body glows in the dark)

(Photoluminescent)



| UP TO | LUMENS | RUN TIME |
|---|---|---|
| | 378 | 202h |

## 5000*

**LIGHT SOURCE**
LED

**BATTERIES**
2 AAA Alkaline

**LENGTH**
14.2 cm (5.59")

**MODES**
High / Low / Flashing



| LUMENS | RUN TIME |
|---|---|
| 202 | 7h |

* This light is available upon a minimum order quantity. Please contact your local Sales Representative for further information.

RECHARGEABLE



## 9050 LED LANTERN

**LIGHT SOURCE**
LED

**BATTERIES**
2 18650 Lithium-ion (included)

**LENGTH**
20,4 cm (8.03")

**MODES**
High / Low / Flashing
Flexible battery system



| UP TO | LUMENS | RUN TIME |
|---|---|---|
| | 3369 | 5h 30m |

**THE VERSATILE LANTERN WITH A DUAL LITHIUM-ION/ ALKALINE BATTERY SYSTEM**

Holds up to 4 lithium-ion rechargeable batteries or up to 16 AA alkaline or NiMH batteries.





For the most up-to-date information, please visit www.peli.com or www.pelicatalogue.com

# ATEX LIGHTS

## ZONE 0 & 1 (CAT. 1 & 2)

Peli's extense range of Zone 0 and Zone 1 torches complies with the highest standards of the European ATEX Directive and meet the IEC (International Electrotechnical Commission) requirements. Designed for use in hazardous areas, professionals working in the pharmaceutical, fire and rescue, hazmat and other high-risk industries can be confident that Peli offers the safety approvals needed for a large variety of risky situations.

**SEE ALL**

**DOWNLOAD OUR POSTER ON ATEX DIRECTIVE 2014/34/EU.**

ZONE 0 ZONE 1

MAGNETIC CLIP

RECHARGEABLE

### 1930Z0 L1™

ZONE 0

**LIGHT SOURCE**
LED

**BATTERIES**
4 LR 44 Alkaline (included)

**LENGTH**
6.7 cm (2.64")

**CERTIFICATIONS**
II 1 G Ex ia op is IIC T6/T4 Ga



| LUMENS | RUN TIME |
|---|---|
| 12 | 4h 15m |

### 1975Z0 MITYLITE™

ZONE 0

**LIGHT SOURCE**
LED

**BATTERIES**
2 AAA Alkaline (included)

**LENGTH**
14.6 cm (5.75")

**CERTIFICATIONS**
II 1 G Ex ia op is IIC T4 Ga



| LUMENS | RUN TIME |
|---|---|
| 117 | 2h 15m |



### 1975Z1 MITYLITE™

ZONE 1

**LIGHT SOURCE**
LED

**BATTERIES**
2 AAA Alkaline (included)

**LENGTH**
14.6 cm (5.75")

**CERTIFICATIONS**
II 2 G Ex ib op is IIB T4 Gb



| LUMENS | RUN TIME |
|---|---|
| 94 | 8h 15m |

### 2010Z0 SABRELITE™

ZONE 0

**LIGHT SOURCE**
LED

**BATTERIES**
3 C Alkaline (not included)

**LENGTH**
20.6 cm (8.11")

**CERTIFICATIONS**
II 1G Ex ia op is IIC T4/T3 Ga



| LUMENS | RUN TIME |
|---|---|
| 129 | 22h |

**Photoluminescent**
2013PL Shroud



### 2220Z1 VB3™

ZONE 1

**LIGHT SOURCE**
LED

**BATTERIES**
2 CR2032 Lithium (included)

**LENGTH**
8.9 cm (3.50")

**CERTIFICATIONS**
II 2 G Ex ib op is IIC T6 Gb



| LUMENS | RUN TIME |
|---|---|
| 8 | 8h |

### 2315Z0

ZONE 0

**LIGHT SOURCE**
LED

**BATTERIES**
2 AA Alkaline (included)


**LENGTH**
15.8 cm (6.22")

**CERTIFICATIONS**
II 1 G Ex ia op is IIC T4 Ga,
II 2 G Ex ib op is IIC T4 Gb



| LUMENS | RUN TIME |
|---|---|
| 115 | 6h |

* For more information on ATEX, see page 6-7

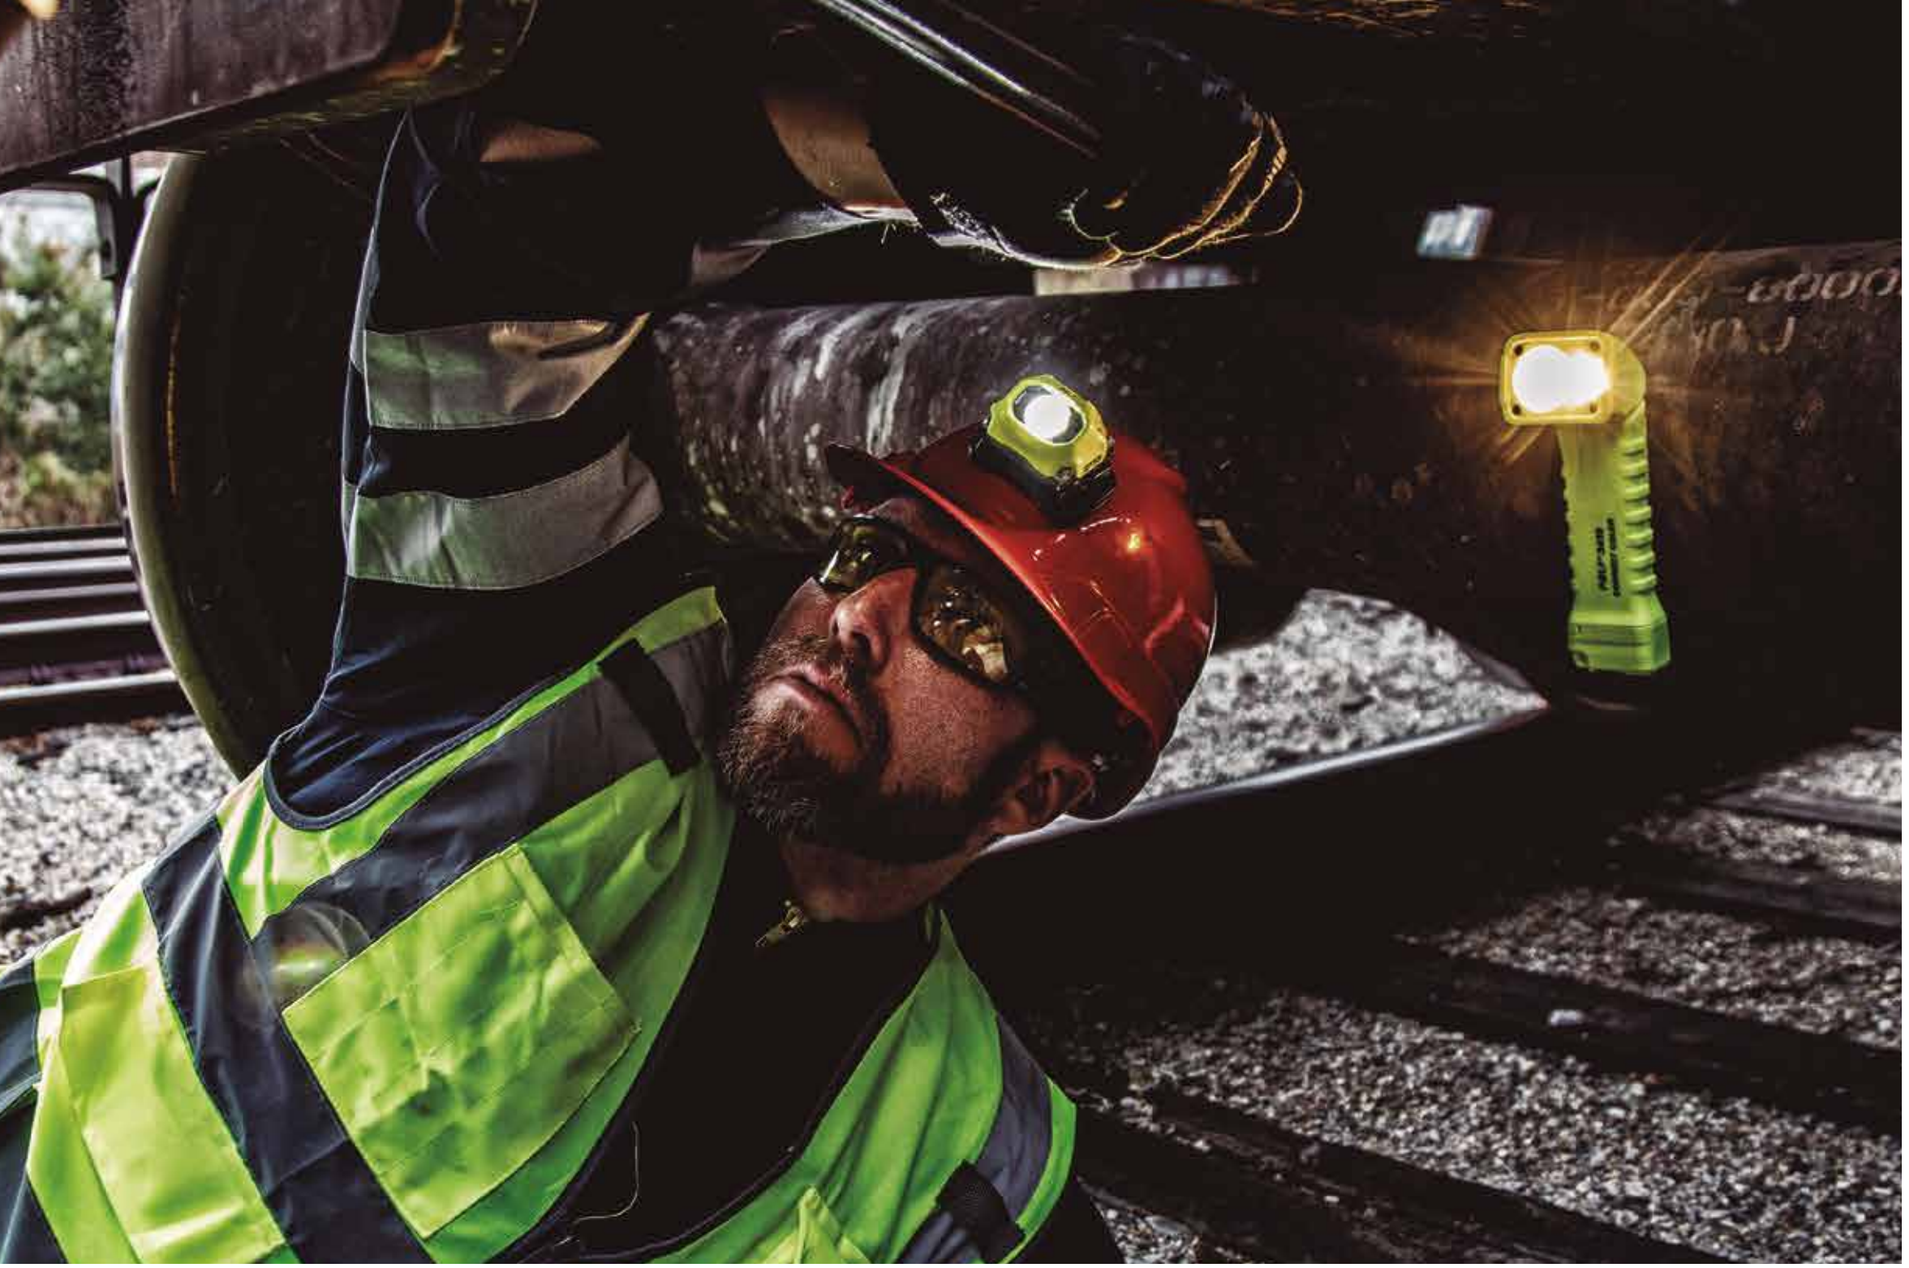

## 2610Z0 HEADSUP LITE™

ZONE 0

**LIGHT SOURCE**
LED
**BATTERIES**
3 AAA Alkaline (included)
**LENGTH**
3.8 cm (1.49")
**CERTIFICATIONS**
II 1 G Ex ia op is IIC T4 Ga



■

| SAFETY CERTIFIED | LUMENS | RUN TIME |
|---|---|---|
| | 30 | 19h |

## 2690Z0 HEADSUP LITE™

ZONE 0

**LIGHT SOURCE**
LED
**BATTERIES**
3 AAA Alkaline (included)
**LENGTH**
7.1 cm (2.81")
**CERTIFICATIONS**
I M1 Ex ia I Ma, II 1 G Ex ia IIC T4 Ga,
II 1D Ex ia IIIC T65ºC Da



■

| SAFETY CERTIFIED | LUMENS | RUN TIME |
|---|---|---|
| | 74 | 11h |

## 2745Z0 HEADSUP LITE™

ZONE 0

**LIGHT SOURCE**
LED
**BATTERIES**
3 AAA Alkaline (included)
**LENGTH**
5.7 cm (2.25")
**CERTIFICATIONS**
II 1 G Ex ia op is IIC T4 Ga
**MODES**
High / Low / Flashing



■ ■

| SAFETY CERTIFIED | LUMENS | RUN TIME |
|---|---|---|
| | 33 | 40h |

## 2410Z0 STEALTHLITE™

ZONE 0

**LIGHT SOURCE**
LED
**BATTERIES**
4 AA Alkaline (included)
**LENGTH**
17.8 cm (7")
**CERTIFICATIONS**
II 1 G Ex ia IIC T4 Ga,
II 1 D Ex ia IIIC T135ºC Da



■

| SAFETY CERTIFIED | LUMENS | RUN TIME |
|---|---|---|
| | 153 | 5h 45m |

## 2460Z1 STEALTHLITE™

ZONE 1

**LIGHT SOURCE**
LED
**BATTERIES**
4 AA NiMH (included)
**LENGTH**
17.8 cm (7")
**CERTIFICATIONS**
II 2 G Ex ib IIC T4 Gb



■

| SAFETY CERTIFIED | LUMENS | RUN TIME |
|---|---|---|
| | 181 | 5h |

## 2755Z0 HEADSUP LITE™

ZONE 0

**LIGHT SOURCE**
LED
**BATTERIES**
3 AAA Alkaline (included)
**LENGTH**
5.7 cm (2.25")
**CERTIFICATIONS**
II 1 G Ex ia op is IIC T4 Ga
**MODES**
High / Low / Flashing



■ ■

| SAFETY CERTIFIED | LUMENS | RUN TIME |
|---|---|---|
| | 115 | 16h |

## 2765Z0 HEADSUP LITE™

ZONE 0

**LIGHT SOURCE**
LED
**BATTERIES**
3 AAA Alkaline (included)
**LENGTH**
5.7 cm (2.25")
**CERTIFICATIONS**
II 1 G Ex ia op is IIC T4 Ga
**MODES**
High / Low / Downcast / Flashing



■ ■

| SAFETY CERTIFIED | LUMENS | RUN TIME |
|---|---|---|
| | 141 | 14h |

ZONE 0 ZONE 1

* For more information on ATEX, see page 6-7

* For more information on ATEX, see page 6-7





For the most up-to-date information, please visit www.peli.com or www.pelicatalogue.com

## 3315Z0

ZONE 0

**LIGHT SOURCE**
LED
**BATTERIES**
3 AA Alkaline (included)
**LENGTH**
15.6 cm (6.14")
**CERTIFICATIONS**
II 1 G Ex ia IIC T4 Ga,
II 1 D Ex ia IIIC T130°C Da



| SAFETY CERTIFIED * | LUMENS | RUN TIME |
|---|---|---|
| | 138 | 19h |

## 3335RZ0

ZONE 0

**LIGHT SOURCE**
LED
**BATTERIES**
1 Lithium-Ion 18650 (included)
**LENGTH**
15.5 cm (6.11")
**CERTIFICATIONS**
III 1 G Ex ia IIC T4 Ga



| SAFETY CERTIFIED * | LUMENS | RUN TIME |
|---|---|---|
| | 246 | 58h |

Right Angle accessory available



## 3765Z0

ZONE 0

**LIGHT SOURCE**
LED
**BATTERIES**
4 AA NiMH (included)
**LENGTH**
13.6 cm (5.36")
**CERTIFICATIONS**
II 1 G Ex ia op is IIC T3 Ga
**MODES**
High / Low / Flashing



| SAFETY CERTIFIED * | LUMENS | RUN TIME |
|---|---|---|
| | 194 | 20h |

## 9415Z0 LED LANTERN

ZONE 0

**LIGHT SOURCE**
LED
**BATTERIES**
4 C NiMH (included)
**LENGTH**
22.2 cm (8.75")
**CERTIFICATIONS**
II 1 G Ex ia IIC T4 Ga
**MODES**
High / Low / Flashing



| SAFETY CERTIFIED * | LUMENS | RUN TIME |
|---|---|---|
| | 530 | 11h 30m |

## 3415MZ0

ZONE 0

**LIGHT SOURCE**
LED
**BATTERIES**
3 AA Alkaline
**LENGTH**
18.9 cm (7.44")
**CERTIFICATIONS**
II 1 G Ex ia op is IIC T4 Ga
**MODES**
High / Flashing



| SAFETY CERTIFIED * | LUMENS | RUN TIME |
|---|---|---|
| | 329 | 14h |

## 3610Z0 LITTLE ED™

ZONE 0

**LIGHT SOURCE**
LED
**BATTERIES**
4 AA Alkaline (included)
**LENGTH**
19.1 cm (7.51")
**CERTIFICATIONS**
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da



| SAFETY CERTIFIED * | LUMENS | RUN TIME |
|---|---|---|
| | 153 | 5h 45m |

## 3715Z0

ZONE 0

**LIGHT SOURCE**
LED
**BATTERIES**
4 AA Alkaline
**LENGTH**
13.6 cm (5.36")
**CERTIFICATIONS**
II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130c Da
**MODES**
High / Low / Downcast / Flashing



| SAFETY CERTIFIED * | LUMENS | RUN TIME |
|---|---|---|
| | 189 | 31h |

**Photoluminescent**
3713PL Shroud






* For more information on ATEX, see page 6-7

* For more information on ATEX, see page 6-7

ZONE 0 MAGNETIC CLIP RECHARGEABLE

# TACTICAL LIGHTS

Peli's tactical lights are field ready and built to withstand the hard knocks that come with the job. The lights are presented pre-focused to provide a beam of very bright central light and long-range, surrounded by one of lower intensity for better peripheral vision.

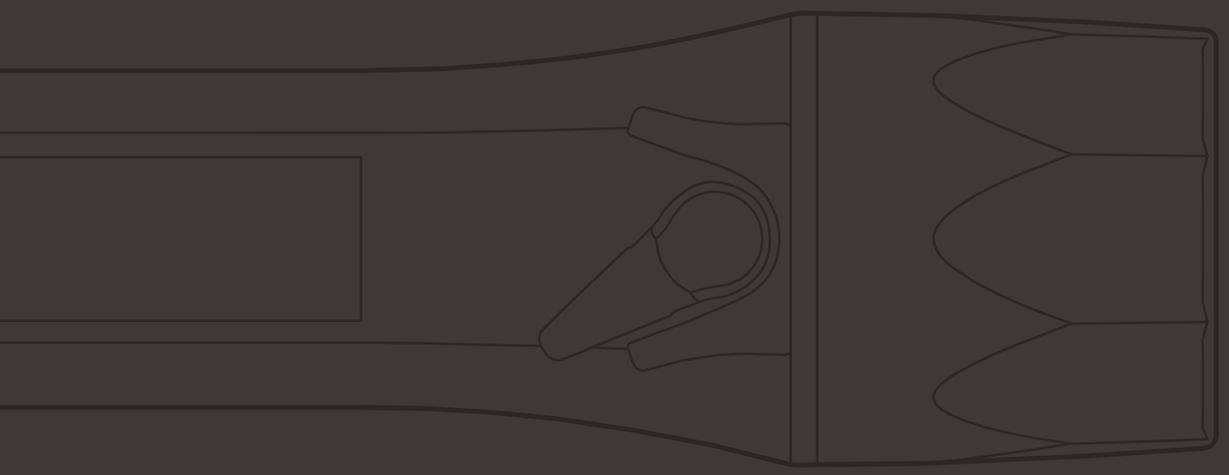

**SEE ALL**

**USB** **RECHARGEABLE**

## 7000*

**LIGHT SOURCE**
LED

**BATTERIES**
2 CR123 Lithium-Ion (included)

**LENGTH**
13.5 cm (5.31")

**MODES**
High / Medium / Low / Strobe

■




| UP TO | LUMENS | RUN TIME |
|---|---|---|
| | 774 | 13h |

## 7060

**LIGHT SOURCE**
LED

**BATTERIES**
1 Lithium-Ion 18650 (included)

**LENGTH**
22 cm (8.65")

**MODES**
High / Strobe / Medium / Low / Self Programmable

■



| UP TO | LUMENS | RUN TIME |
|---|---|---|
| | 402 | 57h |

## 7600

**LIGHT SOURCE**
LED

**BATTERIES**
1 Lithium-Ion 18650 (included)*

**LENGTH**
15.7 cm (6.19")

**MODES**
High / Strobe / Medium / Low / Full Time Battery Level Indication

■



| UP TO | LUMENS | RUN TIME |
|---|---|---|
| | 944 | 29h |

*Multi-battery. Supports also 2 CR123

## 8060

**LIGHT SOURCE**
LED

**BATTERIES**
4 NiMH C (included)

**LENGTH**
32.2 cm (12.67")

**MODES**
High / Strobe / Medium / Low / Flashing / Self Programmable

■



| UP TO | LUMENS | RUN TIME |
|---|---|---|
| | 1072 | 60h |

* This light is available upon a minimum order quantity. Please contact your local Sales Representative for further information.



# HEAD-LAMPS

With up to 558 lumens, revolutionary downcast lighting, USB charging and battery level indication, these headlamps are packed with features. Other options, including night vision friendly red illumination, interchangeable body colours and multiple settings, make these headlamps your best partner for the dark.

SEE ALL

GESTURE ACTIVATION CONTROL

RECHARGEABLE

## 2720 HEADLAMP

**LIGHT SOURCE**
LED

**BATTERIES**
3 AAA Alkaline (included)

**LENGTH**
6.3 cm (2.48")

**MODES**
Variable Light Output /
Dual Red LED Night Vision



■

| UP TO | LUMENS | RUN TIME |
|---|---|---|
| | 200 | 103h |

## 2740 HEADLAMP

**LIGHT SOURCE**
LED

**BATTERIES**
3 AAA Alkaline (included)

**LENGTH**
5.7 cm (2.25")

**MODES**
High / Low / Flashing / Red LED



■

| UP TO | LUMENS | RUN TIME |
|---|---|---|
| | 66 | 21h |

## 2750 HEADLAMP

**LIGHT SOURCE**
LED

**BATTERIES**
3 AAA Alkaline (included)

**LENGTH**
5.7 cm (2.25")

**MODES**
High / Low / Flashing /
Red LED / Low Battery Warning



■ (Photoluminescent)

| UP TO | LUMENS | RUN TIME |
|---|---|---|
| | 259 | 11h |

## 2760 HEADLAMP

**LIGHT SOURCE**
LED

**BATTERIES**
3 AAA Alkaline (included)

**LENGTH**
5.7 cm (2.25")

**MODES**
High / Medium / Low /
Downcast / Flashing / Red LED /
Full-time Battery / Level Indicator



■

| UP TO | LUMENS | RUN TIME |
|---|---|---|
| | 289 | 11h |

## 2780R HEADLAMP*

**LIGHT SOURCE**
LED

**BATTERIES**
1 Lithium-Ion 18650 (included)

**LENGTH**
7.6 cm (3.00")

**MODES**
High / Medium / Low /
Downcast / Spot / Flashing
Full-time Battery Level Indicator



■
3 Interchangeable Covers Included


| UP TO | LUMENS | RUN TIME |
|---|---|---|
| | 558 | 7h 30m |




Photo by HRC

* This light is available upon a minimum order quantity. Please contact your local Sales Representative for further information.


For the most up-to-date information, please visit www.peli.com or www.pelicatalogue.com
For the most up-to-date information, please visit www.peli.com or www.pelicatalogue.com

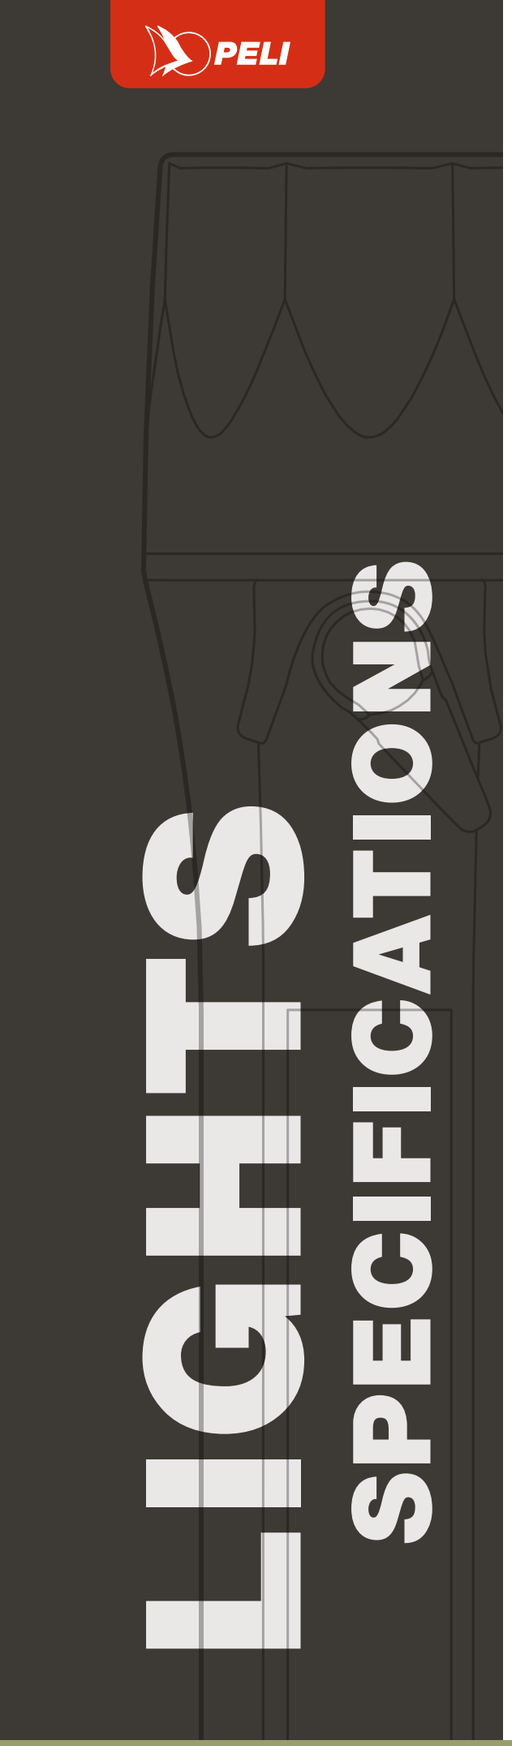

# LIGHTS SPECIFICATIONS

# INDUSTRIAL LIGHTS

| CAT NO. | BATTERIES | WEIGHT W/ BATTERIES | LENGTH | ANSI LIGHT OUTPUT (lumens) | ANSI RUN TIME | ANSI BEAM DISTANCE (meters) | ANSI PEAK BEAM INTENSITY (candela) | ANSI IPX RATING | CERTIFICATIONS | COLOURS | CAT. NO. |
|---|---|---|---|---|---|---|---|---|---|---|---|
| **1910** | 1 AAA Alkaline [A] | 0.043 kg | 9.7 cm | 106*, 21*** | 2h 30m*, 4h*** | 55*, 24*** | 765*, 140*** | IPX7 | N/A | ■ | **1910** |
| **1920** | 2 AAA Alkaline [A] | 0.062 kg | 14 cm | 224*, 22*** | 2h 15m*, 8h 45m*** | 81*, 25*** | 1640*, 152*** | IPX7 | N/A | ■ | **1920** |
| **1930** | 4 LR 44 Alkaline [A] | 0.026 kg | 6.7 cm | 12 | 4h 15m | 17 | 70 | IPX4 | CI, D1/CII, D2 IECEx ia | ■ ■ | **1930** |
| **2010** | 3 C Alkaline | 0.38 kg | 20.6 cm | 161 | 22h | 160 | 6398 | IPX7 | CI II III, D1 IECEx ia | ■ | **2010** |
| **2410** | 4 AA Alkaline [A] | 0.207 kg | 17.8 cm | 183 | 5h 45m | 161 | 6500 | IPX7 | CI II III, D1 IECEx ia | ■ | **2410** |
| **2460** | 4 Ni-MH [A] | 0.221 kg | 17.8 cm | 183 | 5h | 179 | 8050 | IPX7 | CI II, D2 | ■ | **2460** |
| **3310PL** | 3 AA Alkaline [A] | 0.176 kg | 15.6 cm | 378*, 39*** | 8h*, 202h*** | 196*, 62*** | 9580*, 961*** | IPX8 | N/A | ■ (photoluminescent) | **3310PL** |
| **3310ELS** | 3 AA Alkaline [A] | 0.176 kg | 15.6 cm | 378*, 39*** | 8h*, 202h*** | 196*, 62*** | 9580*, 961*** | IPX8 (1m) | N/A | ■ (photoluminescent) | **3310ELS** |
| **5000** | 2 AAA Alkaline [A] | 0.068 kg | 14.2 cm | 202*, 21** | 1h 15m*, 7h** | 69*, 21** | 1176*, 111** | IPX8 (1m) | N/A | ■ [B] | **5000** |
| **9050** | 2 18650 Lithium-Ion [A] | 1.301 kg | 20.4 cm | 3369 (Spot/Flood), 1119 (Flood), 2623 (Spot) | 2h 45m (Spot/Flood), 5h 30m (Flood), 4h 15m (Spot) | 417 (Spot/Flood), 47 (Flood), 489 (Spot) | 43568 (Spot/Flood), 559 (Flood), 59760 (Spot) | IP67 | TBC | ■ | **9050** |

*High | **Medium | ***Low | *****Boost | [A] Batteries Included | [B] This light is available upon a minimum order quantity. Please contact your local Sales Representative for further information.
Additional approvals may apply. For details go to www.peli.com





For the most up-to-date information, please visit www.peli.com or www.pelicatalogue.com

# ATEX TORCHES

| CAT NO. | BATTERIES | WEIGHT W/ BATTERIES | LENGTH | ANSI LIGHT OUTPUT (lumens) | ANSI RUN TIME | ANSI BEAM DISTANCE (meters) | ANSI PEAK BEAM INTENSITY (candela) | ANSI IPX RATING | APPROVALS | COLOURS | CAT. NO. |
|---|---|---|---|---|---|---|---|---|---|---|---|
| **1930Z0** | 4 LR 44 Alkaline [A] | 0.026 kg | 6.7 cm | 12 | 4h 15m | 17 | 70 | IPX4 | II 1 G Ex ia op is IIC T6/T4 Ga | | **1930Z0** |
| **1975Z0** | 2 AAA Alkaline [A] | 0.054 kg | 14.6 cm | 117 | 2h 15m | 24 | 141 | IP68 | II 1 G Ex ia op is IIC T4 Ga | | **1975Z0** |
| **1975Z1** | 2 AAA Alkaline [A] | 0.054 kg | 14.6 cm | 94 | 8h 15m | 22 | 122 | IP68 | II 2 G Ex ib op is IIB T4 Gb | | **1975Z1** |
| **2010Z0** | 3 C Alkaline | 0.38 kg | 20.6 cm | 129 | 22h | 135 | 4582 | IPX7 | II 1G Ex ia op is IIC T4/T3 Ga | | **2010Z0** |
| **2220Z1** | 2 CR2032 Lithium [A] | 0.028 kg | 8.9 cm | 8 | 8h | 12 | 38 | IPX4 | II 2 G Ex ib op is IIC T6 Gb | | **2220Z1** |
| **2315Z0** | 2 AA Alkaline [A] | 0.13 kg | 15.8 cm | 115 | 6h | 75 | 1403 | IPX8 | II 1 G Ex ia op is IIC T4 Ga, II 2 G Ex ib op is IIC T4 Gb | | **2315Z0** |
| **2410Z0** | 4 AA Alkaline [A] | 0.207 kg | 17.8 cm | 153 | 5h 45m | 165 | 6837 | IPX7 | II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da | | **2410Z0** |
| **2460Z1** | 4 AA Ni-MH [A] | 0.221 kg | 17.8 cm | 181 | 5h | 181 | 8235 | IPX7 | II 2 G Ex ib IIC T4 Gb | | **2460Z1** |
| **2610Z0** | 3 AAA Alkaline [A] | 0.91 kg | 3.8 cm | 30*, 14*** | 19h*, 47h*** | 28*, 19*** | 194*, 91*** | IPX4 | II 1 G Ex ia op is IIC T4 Ga | | **2610Z0** |
| **2690Z0** | 3 AAA Alkaline [A] | 0.116 kg | 7.1 cm | 74 | 11h | 92 | 2124 | IPX7 | I M1 Ex ia I Ma, II 1 G Ex ia IIC T4 Ga, II 1D Ex ia IIIC T65°C Da | | **2690Z0** |
| **2745Z0** | 3 AAA Alkaline [A] | 0.94 kg | 5.7 cm | 33*, 17*** | 20h*, 40h*** | 35*, 25*** | 309*, 155*** | IP54 | II 1 G Ex ia op is IIC T4 Ga | | **2745Z0** |
| **2755Z0** | 3 AAA Alkaline [A] | 0.096 kg | 5.7 cm | 115*, 58*** | 8h*, 16h*** | 61*, 43*** | 925*, 455*** | IP54 | II 1 G Ex ia op is IIC T4 Ga | | **2755Z0** |
| **2765Z0** | 3 AAA Alkaline [A] | 0.096 kg | 5.7 cm | 141*, 27**** | 5h30m*, 14h**** | 78*, 9**** | 1512*, 22**** | IP54 | II 1 G Ex ia op is IIC T4 Ga | | **2765Z0** |
| **3315Z0** | 3 AA Alkaline [A] | 0.176 kg | 15.6 cm | 138 | 19h | 146 | 5350 | IP67 | II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130°C Da | | **3315Z0** |
| **3335RZ0** | 1 Lithium-Ion 18650 | 0.130 kg | 15.5 cm | 246*, 30*** | 6h 15m*, 58h*** | 151*, 51*** | 5718*, 649*** | IP67 | III 1 G Ex ia IIC T4 Ga | | **3335RZ0** |
| **3415MZ0** | 3 AA Alkaline | 0.272 kg | 18.9 cm | 329 (Spot/Flood), 174 (Flood), 185 (Spot) | 6h (Spot/Flood), 15h (Flood), 14h (Spot) | 133 (Spot/Flood), 38 (Flood), 134 (Spot) | 4425 (Spot/Flood), 354 (Flood), 4517 (Spot) | IPX8 (1m) | II 1 G Ex ia op is IIC T4 Ga | | **3415MZ0** |
| **3610Z0** | 4 AA Alkaline | 0.298 kg | 19.1 cm | 153 | 5h 45m | 165 | 6837 | IPX7 | II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T135°C Da | | **3610Z0** |
| **3715Z0** | 4 AA Alkaline | 0.408 kg | 13.6 cm | 189*, 90***, 23**** | 4h*, 7h***, 31h**** | 249*, 157***, 24**** | 15552*, 6150***, 150**** | IPX4 | II 1 G Ex ia IIC T4 Ga, II 1 D Ex ia IIIC T130c Da | | **3715Z0** |
| **3765Z0** | 4 AA NiMH [A] | 0.414 kg | 13.6 cm | 194*, 92***, 24**** | 3h 30m*, 6h 45m***, 20h**** | 256*, 161***, 24**** | 16392*, 6454***, 146**** | IPX4 | II 1 G Ex ia op is IIC T3 Ga | | **3765Z0** |
| **9415Z0** | 4 C NiMH [A] | 1.65 kg | 22.2 cm | 530*, 202*** | 4h 30m*, 11h 30m*** | 272*, 166*** | 18480*, 6914*** | IPX4 | II 1 G Ex ia IIC T4 Ga | | **9415Z0** |

*High | **Medium | ***Low | ****Downcast | [A] Batteries Included
Additional approvals may apply. For details go to www.peli.com


For the most up-to-date information, please visit www.peli.com or www.pelicatalogue.com
For the most up-to-date information, please visit www.peli.com or www.pelicatalogue.com

# TACTICAL LIGHTS

| CAT NO. | BATTERIES | WEIGHT W/ BATTERIES | LENGTH | ANSI LIGHT OUTPUT (lumens) | ANSI RUN TIME | ANSI BEAM DISTANCE (meters) | ANSI PEAK BEAM INTENSITY (candela) | ANSI IPX RATING | CERTIFICATIONS | COLOURS | CAT. NO. |
|---|---|---|---|---|---|---|---|---|---|---|---|
| **7000** | 2 CR123 Lithium [A] | 0.159 kg | 13.5 cm | 774*, 457**, 99*** | 1h 15m*, 1h 45m**, 13h*** | 246*, 176**, 83*** | 14768*, 7712**, 1738*** | IPX7 | N/A | ■ [B] | **7000** |
| **7060** | 1 Lithium-Ion 18650 [A] | 0.295 kg | 22 cm | 402*, 162**, 18*** | 3h 30m*, 12h**, 57h*** | 210m*, 131m**, 45m*** | 11078*, 4312**, 500*** | IPX4 | N/A | ■ | **7060** |
| **7600** | 1 Lithium-Ion 18650 [A] | 0.196 kg | 15.7 cm | 944*, 479**, 37*** | 3h 15m*, 4h 30m**, 29h*** | 225*, 157**, 44*** | 12693*, 6172**, 480*** | IPX8 (1m) | N/A | ■ | **7600** |
| **8060** | 4 C NiMH [A] | 0.658 kg | 32.2 cm | 1072*, 551**, 29*** | 3h 45m*, 4h 15m**, 60h*** | 376*, 265**, 60*** | 35300*, 17520**, 889*** | IPX6 | N/A | ■ | **8060** |

# HEADLAMPS

| CAT NO. | BATTERIES | WEIGHT W/ BATTERIES | LENGTH | ANSI LIGHT OUTPUT (lumens) | ANSI RUN TIME | ANSI BEAM DISTANCE (meters) | ANSI PEAK BEAM INTENSITY (candela) | ANSI IPX RATING | CERTIFICATIONS | COLOURS | CAT. NO. |
|---|---|---|---|---|---|---|---|---|---|---|---|
| **2720** | 3 AAA Alkaline [A] | 0.108 kg | 6.3 cm | 200*, 12*** | 3h*, 103h*** | 82*, 20*** | 1684*, 103*** | IPX4 | N/A | ■ | **2720** |
| **2740** | 3 AAA Alkaline [A] | 0.094 kg | 5.7 cm | 66*, 36*** | 7h 15m*, 21h*** | 22*, 16*** | 122*, 68*** | IPX4 | N/A | ■ | **2740** |
| **2750** | 3 AAA Alkaline [A] | 0.096 kg | 5.7 cm | 259*, 71*** | 2h 30m*, 11h*** | 90*, 48*** | 2041*, 573*** | IPX4 | N/A | ■ (photoluminescent) | **2750** |
| **2760** | 3 AAA Alkaline [A] | 0.096 kg | 5.7 cm | 289*, 156**, 97***, 42**** | 1h 30m*, 3h 15m**, 5h 30m***, 11h**** | 101*, 66**, 48***, 19**** | 2540*, 1097**, 567***, 88**** | IPX4 | N/A | ■ | **2760** |
| **2780R** | 1 Lithium-Ion 18650 [A] | 0.207 kg | 7.6 cm | 558*, 213**, 95*** | 2h*, 3h**, 7h 30m*** | 127*, 78**, 53*** | 4060*, 1540**, 695*** | IPX7 | N/A | ■ [B] | **2780R** |

*High | **Medium | ***Low | ****Downcast | [A] Batteries Included | [B] This light is available upon a minimum order quantity. Please contact your local Sales Representative for further information. Additional approvals may apply. For details go to www.peli.com


For the most up-to-date information, please visit www.peli.com or www.pelicatalogue.com
For the most up-to-date information, please visit www.peli.com or www.pelicatalogue.com



# LIGHT MOUNTING SYSTEMS AND HOLSTERS

## ACCESSORIES

### HOLSTER STYLES

| CAT. NO. | CAT. NO. 7607 |
|---|---|
| |  |
| 7600 | • |

### LIGHT AND HEADLAMP HOLDER STYLES

| CAT. NO. | CAT. NO. 0770C, UNIV. | CAT. NO. 0782 ALL IN* | CAT. NO. 2748Z0 | CAT. NO. 1975HZ0 |
|---|---|---|---|---|
| |  |  |  |  |
| 1975Z0 | | | | • |
| 2390 | • | | | |
| 2410 | • | | | |
| 2460 | • | | | |
| 2745Z0 | | | • | |
| 2755Z0 | | | • | |
| 2765Z0 | | | • | |
| 3310 | • | • | | |
| 3315 | • | • | | |

* This item is available upon minimum order quantities. Check with your Customer Service representative for further details.


For the most up-to-date information, please visit www.peli.com or www.pelicatalogue.com
For the most up-to-date information, please visit www.peli.com or www.pelicatalogue.com




# CUSTOM LABELS

# MORE THAN A FLASH-LIGHT

**LIMITED LIFETIME* GUARANTEE**

* Lifetime guarantee not applicable where prohibited by law.

Peli offers the ultimate in private labeling. You can put your company name and logo or a special statement on many Peli lights. Our in-house private label molding and production department has complete short and long run capabilities for a variety of custom applications and custom colours.

We have the latest hot stamping equipment, utilizing the world's most durable inks and foils in our screening, hot tipping, embossing, and moulding programs.




**GRAPHIC DESIGN STUDIO**

Our in-house graphics studio will take your logo and size it appropriately to the torch of your choice.



**HOT STAMPING**

Our hot stamping department, equipped with the latest technology in custom imprinting.
Minimum quantities apply.



**LASER ETCHING**

Available only on metal bodied lights.



**SELF PROGRAMMABLE**
(On selected models only)



**PIVOTING 60° HEAD**
(On selected models only)




**GESTURE ACTIVATION**
(On selected models only)



**USB RECHARGEABLE**
(On selected models only)




**DOWNCAST LIGHTING FEATURES**
(On selected models only)




**PHOTOLUMINESCENT DESIGNS**
(On selected models only)


For the most up-to-date information, please visit www.peli.com or www.pelicatalogue.com

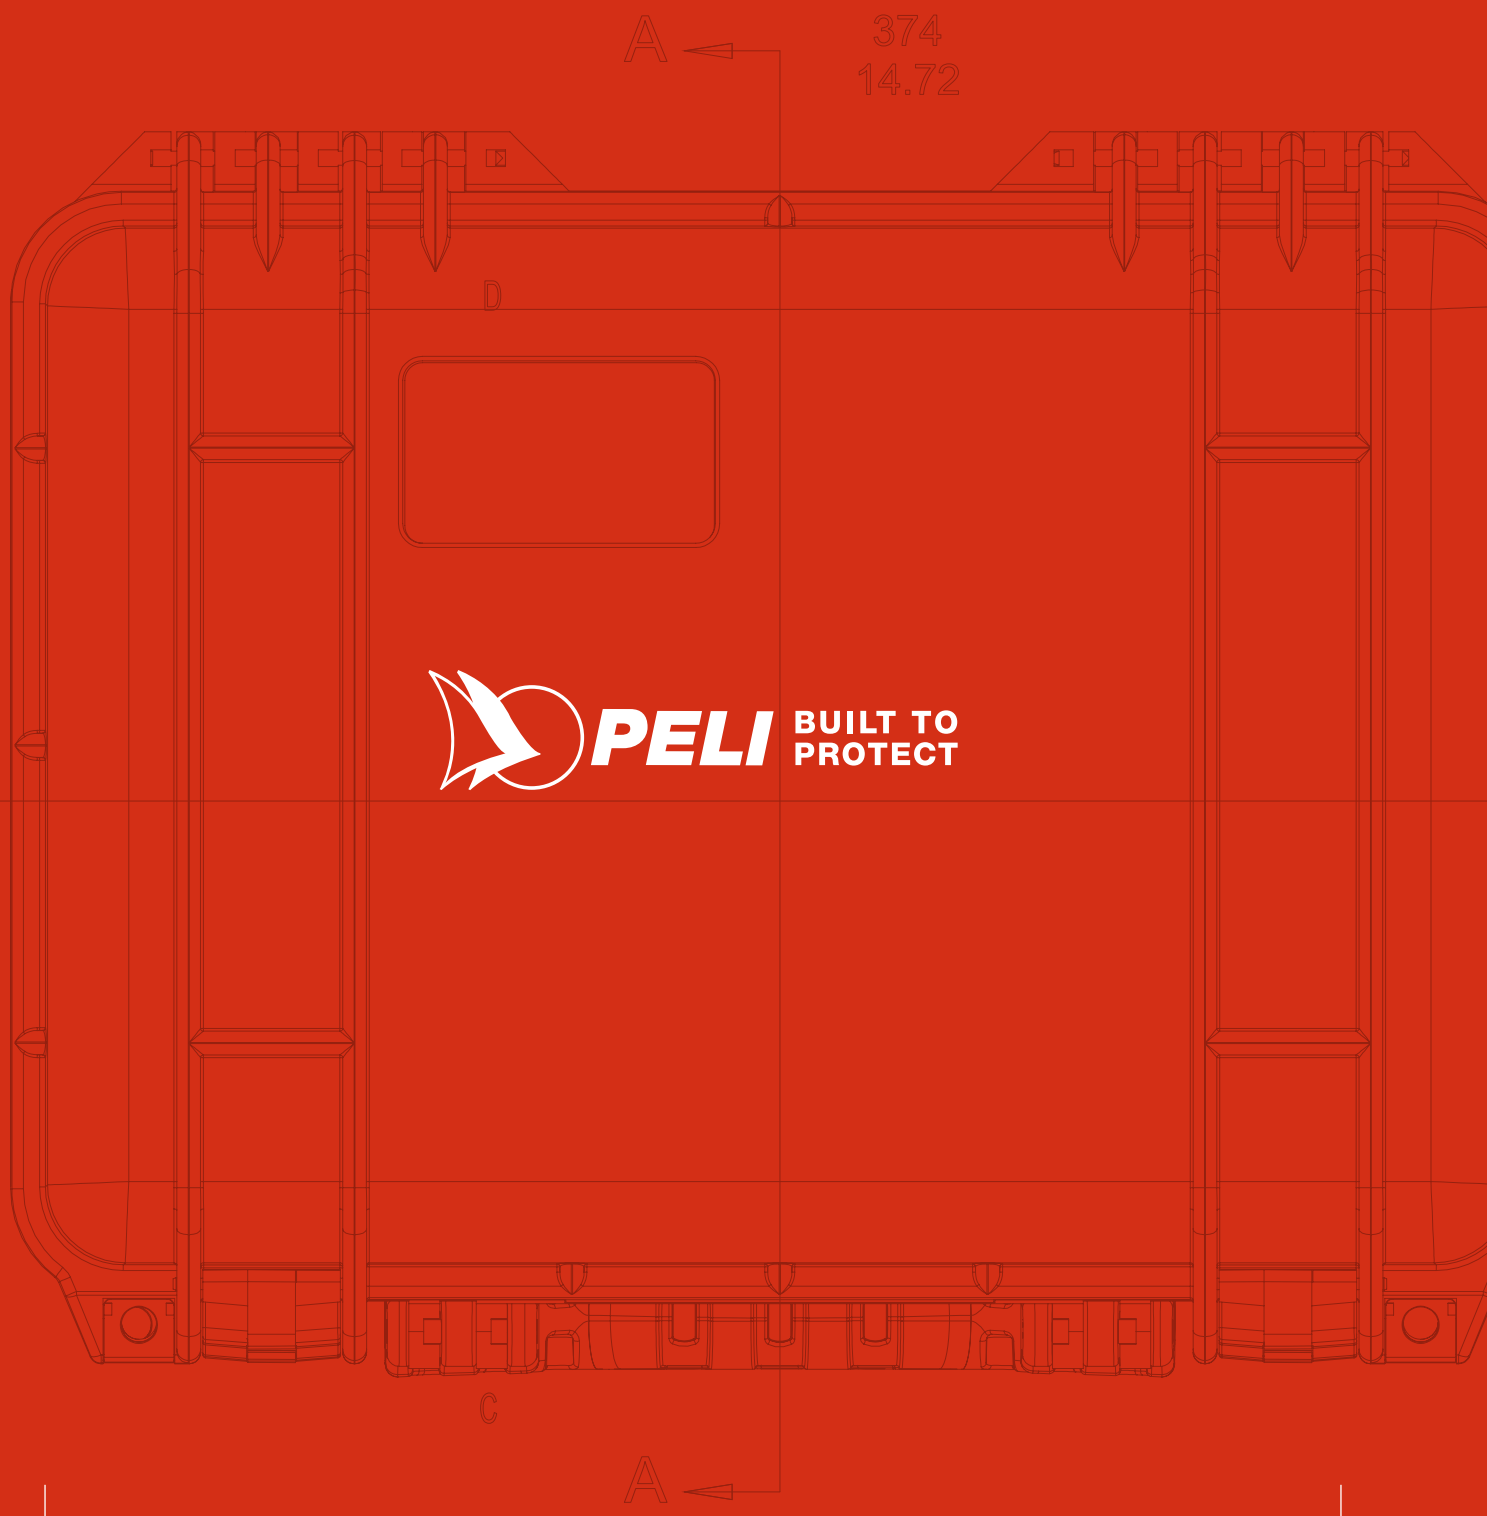


PELI BUILT TO PROTECT

**STEBER s.r.o.**
Kolónia 2856/61
92401 Galanta
SLOVAKIA
www.steberg.sk
info@steberg.sk

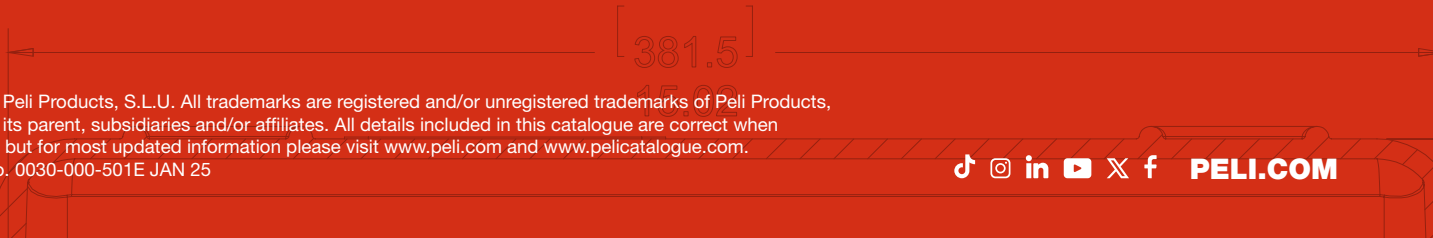


©2025 Peli Products, S.L.U. All trademarks are registered and/or unregistered trademarks of Peli Products, S.L.U., its parent, subsidiaries and/or affiliates. All details included in this catalogue are correct when printed but for most updated information please visit www.peli.com and www.pelicatalogue.com.
Part No. 0030-000-501E JAN 25

PELI.COM